


S19H 系列弹簧驱动电缆卷筒

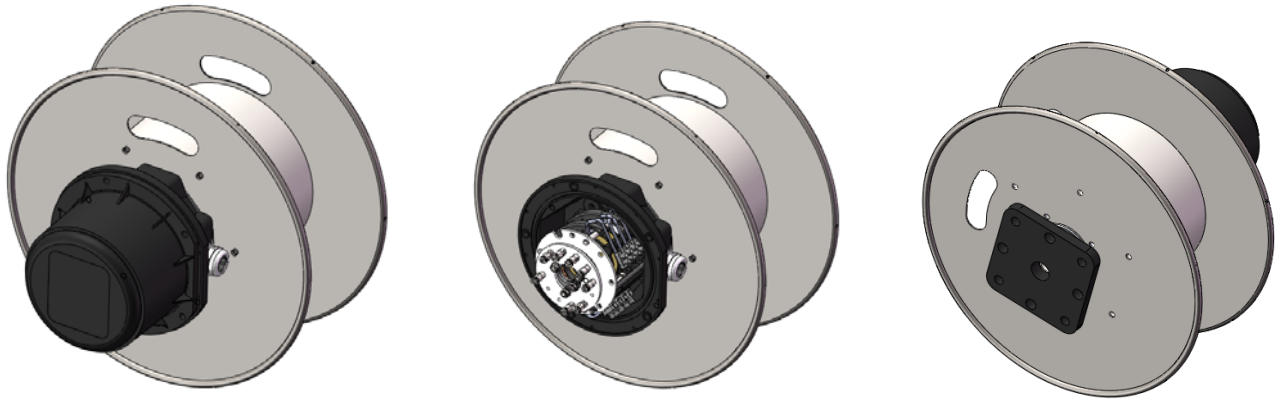

技术参数: Technical parameters:

材料及构造: 卷筒本体及安装法兰采用钢件制造。弹簧为高寿命高等级的弹簧钢。

Materials & Structure: The drum body and mounting flange are made of steel. Spring is the high life high-grade spring steel.

卷绕速度: 水平卷绕 63m/min 垂直卷绕 30m/min

Winding speed: Horizontal : 63m/min Vertical winding: 30m/min

卷取长度: 水平最大卷绕长度: 20 米, 垂直最大卷绕长度 20 米

Winding length: The Max Horizontal winding length: 20m, The Max Vertical winding length: 20m

电缆参数: 外径 Max $\Phi 15\text{mm}$, 重量 Max 0.46kg/m;

Cable Spec: MaxOD: $\Phi 15\text{mm}$, Max weight: Max 0.46kg/m;


电气参数: $V_{\text{max}} 500\text{V}$, $I_{\text{max}} 30\text{A}$

Electric parameter: $V_{\text{max}} 500\text{V}$, $I_{\text{max}} 30\text{A}$

防护等级: IP54

Grade: IP54

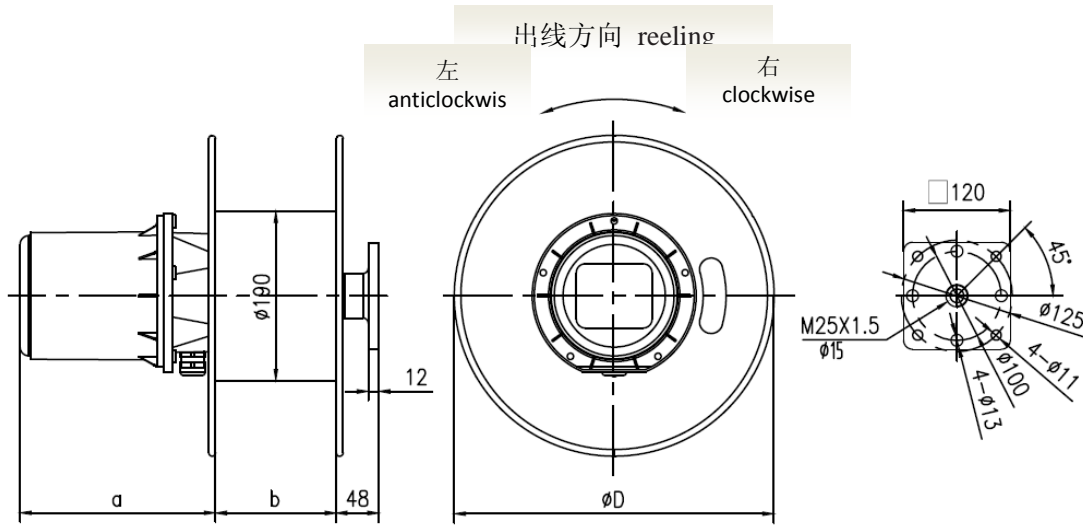

S19H 型选型表
S19H type Selection Tables for Reels

 Application: **A** Vertical **D** Horizontal and Vertical Retrieval

电缆 Cable	卷取 方式	电缆长度 Lw/Li (m)	卷筒型号 Reel type	D (mm)	a (mm)	b (mm)	滑环箱 Slipring- body	法兰 Flange type
4×1.5mm ² Φ9.2mm 0.133kg/m	A	6/1.5	S19H2914-0304-1A	290	175	136	1	1.1
	D	6/1.5						
	A	12/1.5	S19H3314-0304-2S	330	175	136	1	1.1
	D	12/1.5						
	A	20/1.5	S19H3614-0304-3S	360	175	136	1	1.1
	D	20/1.5						
5×1.5mm ² Φ10.1mm 0.143kg/m	A	6/1.5	S19H2914-0305-1A	290	175	136	1	1.1
	D	6/1.5						
	A	12/1.5	S19H3314-0305-2S	330	175	136	1	1.1
	D	12/1.5						
	A	20/1.5	S19H3614-0305-3S	360	175	136	1	1.1
	D	20/1.5						
7×1.5mm ² Φ11 mm 0.19kg/m	A	6/1.5	S19H2914-0307-1A	290	220	136	1	1.1
	D	6/1.5						
	A	12/1.5	S19H3314-0307-2S	330	220	136	1	1.1
	D	12/1.5						
	A	20/1.5	S19H3614-0307-3S	360	220	136	1	1.1
	D	20/1.5						
8×1.5mm ² Φ14.5mm 0.312kg/m	A	6/1.5	S19H3314-0208-1A	330	220	136	1	1.1
	D	6/1.5						
	A	12/1.5	S19H3614-0208-2S	360	220	136	1	1.1
	D	12/1.5						
	A	20/1.5	S19H3614-0208-3S	360	220	136	1	1.1
	D	20/1.5						

电缆 Cable	卷取 方式	电缆长度 Lw/Li (m)	卷筒型号 Reel type	D (mm)	a (mm)	b (mm)	滑环箱 Slipring- body	法兰 Flange type
4×2.5mm ² Φ10mm 0.179kg/m	A	6/1.5	S19H2914-0204-1A	290	175	136	1	1.1
	D	6/1.5						
	A	12/1.5	S19H3314-0204-2S	330	175	136	1	1.1
	D	12/1.5						
	A	20/1.5	S19H3614-0202-3S	360	175	136	1	1.1
	D	20/1.5						
5×2.5mm ² Φ12mm 0.22kg/m	A	6/1.5	S19H3314-0205-1A	330	175	136	1	1.1
	D	6/1.5						
	A	12/1.5	S19H3314-0205-2S	330	175	136	1	1.1
	D	12/1.5						
	A	20/1.5	S19H3614-0205-3S	360	175	136	1	1.1
	D	20/1.5						
7×2.5mm ² Φ14.8mm 0.334kg/m	A	6/1.5	S19H3314-0207-1A	330	220	136	1	1.1
	D	6/1.5						
	A	12/1.5	S19H3614-0207-2S	360	220	136	1	1.1
	D	12/1.5						
	A	20/1.5	S19H3614-0207-3S	360	220	136	1	1.1
	D	20/1.5						
4×4mm ² Φ14mm 0.322kg/m	A	6/1.5	S19H3314-0204-1A	330	175	136	1	1.1
	D	6/1.5						
	A	12/1.5	S19H3614-0204-2S	360	175	136	1	1.1
	D	12/1.5						
	A	20/1.5	S19H3614-0204-3S	360	175	136	1	1.1
	D	20/1.5						





湖南海润电气有限公司

Hunan Hairun Electric Co., Ltd.

地址：湖南省岳阳市麻塘镇

Address: Ma Town, Yueyang City, Hunan Province

电话 (Tel): +86-730-7830777 7832777

传真 (Fax): +86-730-7831777

邮箱 (Email): gs@hinar.com.cn

网址 (Website): <http://www.hinar.com.cn>